



**YOUR PROFESSIONAL  
LITHIUM BATTERY  
SOLUTION PROVIDER**



**Lithium  
Storage**

# NCM102AH




**LITHIUM STORAGE** can offer different terminal solution for cells with welding terminals, including screw terminals and nut terminals. These solutions have passed the multiple inspection testing items such as drawing force, shear force and torque testing etcetera and have been applied in the various electric vehicles and energy storage projects in the different countries.




ITEM	SPECIFICATIONS	NOTE
Rated Capacity	102Ah	@1C
Nominal Voltage	3.7V	@1/3C
Actual Voltage Range	2.8-4.3V	
Constant Discharge Current	≤100A	Typical Value=33.3A
Peak Discharge Current	≤400A	@10s
Constant Charge Current	≤100A	Typical Value=33.3A
Peak Charge Current	≤300A	@10s
Operating Temperature	Charge: -20°C~55°C Discharge: -30°C~55°C	
Storage Temperature	- 20°C~55°C	
Cell Dimensions	Thickness:52.20±0.3mm Length:148.90±0.3mm Height: 95.80±0.5mm	
Cathode Material	NCM523	
Weight	1.70±0.3kg	
Energy density	218Wh/kg      506Wh/L	
Cycle life	≥2000 times	@0.33C/1C 100%DOD,80%EOL
Terminal	Welding/Nut Terminals	

# DRAWING

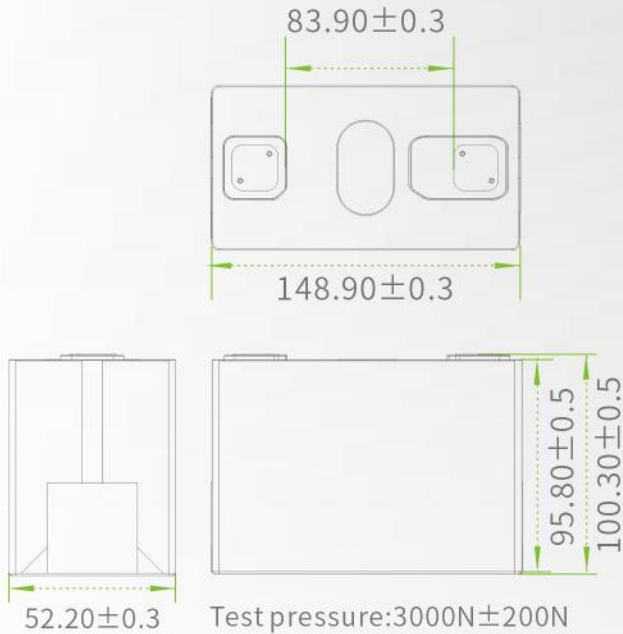

# TERMINAL

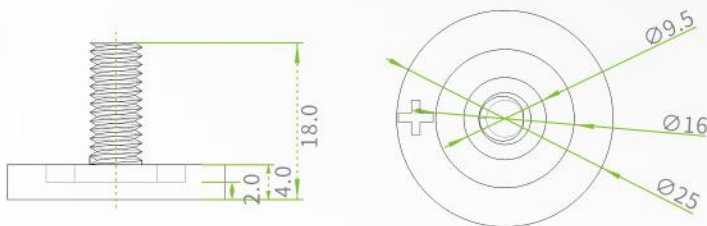

Nut Terminal · M6\*18

# ADVANTAGE

- VDA dimension format and holistic safety concept of cell.
- Outstanding energy density with maximum reliability.
- Continuously improved energy density though new materials and light weighting technology.
- Modular design for various applications and easy upgrade to next generations.
- Suitable for passenger vehicles and vehicles with limited space etcetera.



- 
- ✉ [info@lslithiumbattery.com](mailto:info@lslithiumbattery.com)
  - 🌐 [www.lslithiumbattery.com](http://www.lslithiumbattery.com)
  - 📍 Nanjing office | Wenzhou Factory | UK Branch
  - ☎ +86-(0)25-87736807
  - ☎ +86-(0)25-87739887